



Ino-Steel™

MANUFACTURER NEWLIFE MAGNETICS

PRINTABLE FLEXIBLE MAGNETIC RECEPTIVE SHEETING

MACO® | Wall-Mag™ | Digital Magnet | Hi-Force Magnet | EZ-Film™ Steel | EZ-Film™ Mag

Newlife's MACO® magnetic system is widely used in POP and sign display industrials, which is composed by high quality steel sheeting **Ino-Steel™** and magnetic base **Wall-Mag™**. Once installed the magnetic base, it can be used for a long time and easy to change. Our wide-format **Ino-Steel™** are ideal for POP displays. This material is non-magnetic and can be installed quickly, removed, exchanged, re-installed, and stacked on **Wall-Mag™** 1 to 4 layers thick to create a message that can be added to, changed, or removed easily. Our printable magnetic receptive materials are suitable for UV, eco-solvent, solvent, and latex inks etc.




SPECIFICATION

PART NO.	DESCRIPTION & SUPERIORITY	MAGNETIC CONDUCTION	PRINTABILITY	LENGTH x WIDTH
NS-UV-WT010	10mil with higher magnetic conduction than others. Steel sheeting laminated with semi-matt white PET (polyester film), UV cured and Latex suitable	≥ 10.4Lbs. pull/ft2 (≥5g/cm2)	UV L	100ft x 50" 100ft x 54" 100ft x 60"
NS-SOL-WT010	10mil with higher magnetic conduction. Steel sheeting laminated with semi-matt white PET (polyester film), good for eco-solvent and eco-solvent printer.	≥ 10.4Lbs. pull/ft2 (≥5g/cm2)	S ES LS UV profile dependent	100ft x 50" 100ft x 54" 100ft x 60"
NS-P012	12mil with higher magnetic conduction. Steel sheeting laminated with matt white PP (polypropylene film).	≥ 10.4Lbs. pull/ft2 (≥5g/cm2)	UV L	100ft x 50" 100ft x 54" 100ft x 60"
NS-ART013	13mil, Steel sheeting laminated with semi-matt paper, the most economical solution	≥ 10.4Lbs. pull/ft2 (≥5g/cm2)	UV L LS OF FL	100ft x 50" 100ft x 54" 100ft x 60"



WIDER, THINNER, LIGHTER
Width ranges from 24" to 60".
Standard thickness is 10~13 mil.

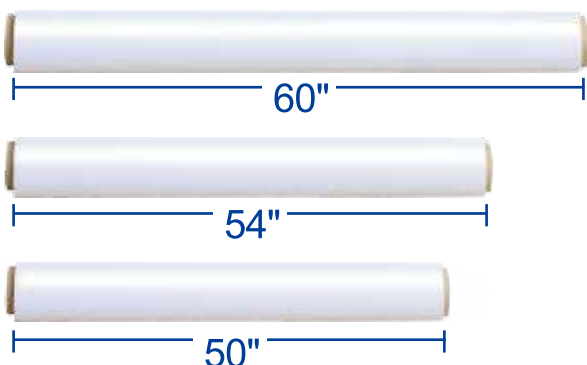

DIRECT PRINTING SOLUTION
Magnetic printable media for solvent, eco-solvent, UV, offset and flexo print.
High resolution printing performance.





Ino-Steel™

MANUFACTURER NEWLIFE MAGNETICS

PRINTABLE FLEXIBLE MAGNETIC RECEPTIVE SHEETING


MACO MAGNETICS DISPLAY SYSTEM - Ino-Steel™ + Wall-Mag™



Ino-Steel™ is steel sheeting laminated with high quantity printable media which has excellent magnetic receptive ability. It can be applied with magnetic surface **Wall-Mag™**

INSTALLATION ON STEEL SURFACE :


Stick **Wall-Mag™ 2 Sides mag** on a steel surface first then stick printed **Ino-Steel™** directly on magnet.



Steel Surface


Wall-Mag™ 2 Sides mag

Ino-Steel™

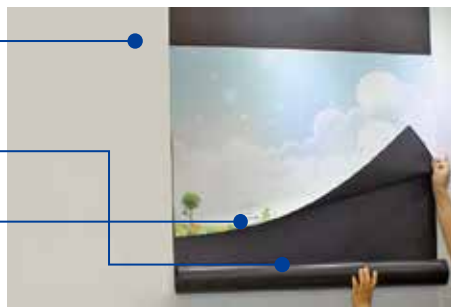

INSTALLATION ON NON-STEEL SMOOTH SURFACE :

For non-steel smooth surface, install **Wall-Mag™ Adhesive** first then stick printed **Ino-Steel™** directly on magnet.



Non-steel Smooth Surface

Wall-Mag™ Adhesive

Ino-Steel™



Wall-Mag™ is magnetic material which perfectly applied to match **Ino-Steel™** or other steel film.

Wall-Mag™ Adhesive Magnet with adhesive has one side magnetized and other side with outdoor adhesive. We offer standard and high energy magnetic property.

Wall-Mag™ 2 Sides mag Magnetized on both sides, with high energy magnetic property material.



NEWLIFE MAGNETICS LLC

3260 NORTHBEND CIRCLE

SUITE B, BUILDING 4

ALCOA, TN. 37701

PHONE # (865) 233-3899 OR (865) 238-0067

WWW.NEWLIFEMAGNETICS.COM