



# MANUFACTURER NEWLIFE MAGNETICS

## MACO MAGNETIC DISPLAY SYETEM SPECIFICATION SHEET

MACO NM MAGNET SHEETING SERIES

**NMB-WT31**


Edition: A0

NO: NMEQS-MACO 164

### FEATURES AND ADVANTAGES:

- White matte PET with magnet sheeting, compatible for pigment ink printing.
- Working as magnetism principle on iron or steel surface, easy to apply, remove and change, without residue
- Without demagnetized, anti-rust
- Premium PET base, good weather resistance, excellent for durable indoor display, such as elevator, steel door, car sign.

### CONSTRUCTION DRAWING:

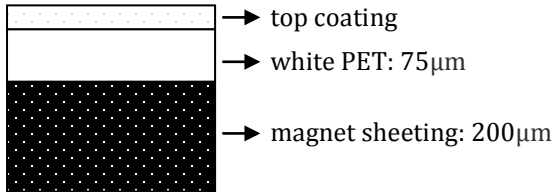


### STANDARD SIZE:

- 30M×1270mm
- 30M×1370mm
- 30M×1524mm

### PACKAGING:



3" core



lid-tray box

### PRINTING INDEX:

- compatible
- Δ testing required
- × not compatible

(ECO) SOLVENT	UV CURABLE	LATEX	DYE/PIGMENT	OFFSET/FLEXO	SCREEN PRINT	TONER BASED
×	Δ	Δ	○	○	○	×

### MAGNETIC DATA:

Pull Strength: ≥7.0 (g/cm<sup>2</sup>)  
Guass: ≥110Gs

### PHYSICAL DATA:

Total thickness	310µm (±30)
Weight	660g/M <sup>2</sup> (±66)
Whiteness	[80, 90]
Gloss 60°	[3, 8]
Opacity	100%
Water resistance	Medium-high

### PROCESS AND STORAGE:

- Working condition: temperature 15°C to 30°C, and relative humidity 30% to 60%.
- Application condition: temperature change is within 40°C daily.
- Storage condition: closed preserve avoiding sunlight, in temperature 10°C to 35°C, relative humidity 20% to 70%
- Shelf life: 12 months under storage condition. Unfinished material should be seal-packed, and used up within one month.

### NOTICE:

- For more information, please get reference from our "User Guide"