


For more information call
NEWLIFE MAGNETICS LLC
FLEXIBLE MAGNETS

www.newlifemagnetics.com

1-865-233-3899

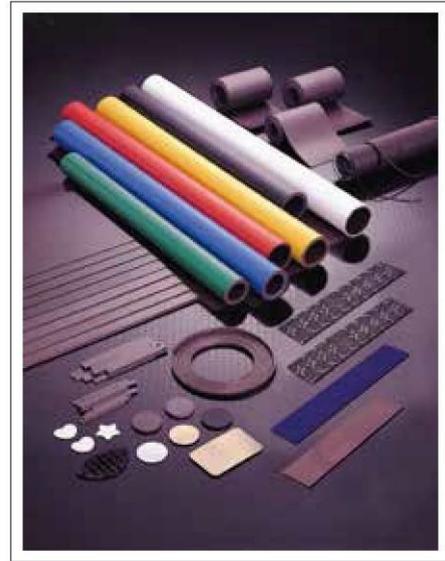

NEWLIFE MAGNETICS LLC

**CLEAN AND CARE
GUIDELINES**

IMPORTANT INFORMATION
READ BEFORE USING!

*THANK YOU FOR CHOOSING **NEWLIFE** BRAND FLEXIBLE MAGNETIC SHEETING. FOLLOWING THESE GUIDELINES WILL GIVE YOU YEARS OF TROUBLE FREE SERVICE WITH YOUR **NEWLIFE** FLEXIBLE MAGNETIC PRODUCT.*

SURFACE PREPARATION

The vehicle's surface should be waxed a minimum of 48 hours prior to applying **NEWLIFE** flexible magnetic sheeting. For new vehicles or newly painted vehicles, allow approximately 90 days for the paint to totally cure before applying **NEWLIFE** flexible magnetic sheeting. Wipe the surface of the vehicle with a clean dry cloth before application and make sure that all grime, dust and dirt has been removed.

INSTALLATION

It is best to apply **NEWLIFE** flexible magnetic sheeting when the temperature of the magnet is near room temperature or about 68°F. Carefully align one edge of the flexible magnetic sheeting to the vehicle's surface. Allow the remainder of the sheet to apply itself to the vehicle's surface. Do not allow any air pockets to form under the magnetic sheeting and if it isn't aligned properly, be sure to completely remove the sheeting and start over again. Do not pull or drag **NEWLIFE** to realign. This can damage or stretch the material.

REMOVAL

Remove **NEWLIFE** flexible magnetic sheeting periodically to guard against moisture and dirt buildup. On vehicles, it is recommended to remove daily to ensure that the vehicle and the magnetic sheet surfaces are clean and free of roadway debris. Dirt trapped between **NEWLIFE** magnetic sheeting and your vehicle can damage its finish.

CLEANING

Clean **NEWLIFE** flexible magnetic sheeting as well as the surface to be re-applied with a mild detergent, wipe with a soft cloth and allow drying. This will help to lengthen the life of your **NEWLIFE** product and protect the surface of your vehicle.

STORAGE

It is recommended to store **NEWLIFE** flexible magnetic sheeting in a clean dry area at room temperature or about 68°F. If rolling, roll with printed or non-magnetic side out and store it on end to avoid any flat spots. When storing **NEWLIFE** product in a flat position, store it on a clean, smooth and flat surface. Do not stack magnetic side to magnetic side due to the potential of wrinkling caused by improper pole alignment.

CAUTION

Avoid using **NEWLIFE** product on repainted surfaces, non-metallic body fillers and wood grain vinyl siding.

NOTE

Failure to follow the **NEWLIFE** clean and care guidelines may cause damage to the applied surface and/or the magnetic material itself. **NEWLIFE** cannot accept and will not be held liable for any damage caused by abuse, misuse or the failure to follow these clean and care guidelines.

Other great products from **NEWLIFE** include WIDEMAG^{III} for wide-format digital imaging, magnetic photo paper, magnetic tape, magnetic strip and custom magnetic extrusions; All from **NEWLIFE**, the world's largest manufacturer of flexible magnetic materials!